


E-251

Inox - Imprimación puertas
 Perfecta integración con el techo
 Stainless Steel - Door printing
 Perfect integration into your ceiling

A+

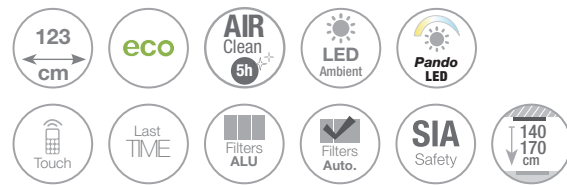

Motor Intermedio exterior / Duct-in-line motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
123	V.2450 eco	Ø200	A+	9560

Motor de tejado / Remote Motor: Roof Outdoor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
123	V.2350 eco	Ø200	A+	9561



Opcional / Options
 Inox / Stainless Steel
 Esmaltado blanco / White

Las unidades con motorizaciones V.2450 Intermedio Exterior y V.2350 Tejado, incorporan de serie 5 m de tubo de extracción de humos SEC System® de Ø203 mm interior y Ø253 mm exterior.
 This model with the V.2450 duct-in-line remote motor and V.2350 roof motor system comes with 5 m of S.E.C. fume extractor flue as standard System®, interior Ø 203 mm and exterior Ø 253.

Opcionales / Options

AirLink

Modelo compatible. Es imprescindible solicitar esta opción en el pedido de la campana.
 No se equipa de serie
 Compatible Model. This option must be requested together with the purchase order.
 Is not included as standard.

Kits de recirculación FCLR-AE. Ver página 206
 Activated carbon filters kit. FCLR-AE. See page 206

Conjunto botonera INOX de encastre a pared. Solo suministrado con la campana
 Stainless steel button panel set for embedding into the wall

Conjunto botonera BLANCO de encastre a pared. Solo suministrado con la campana
 White enamel button panel set for embedding into the wall

Notas / Notes

Puertas preparadas con imprimación para poder pintarlas con el color del techo.
 The panels comes with an epoxy prime printing so they can be later painted any color as the ceiling

Salida de humos de serie: Lateral largo, lateral corto o techo
 Standard fume outlet option: long side, short side or ceiling


Este modelo incorpora solo luz de cortesía
 This model incorporates courtesy lighting only

AirClean

Sistema automático de funcionamiento del motor 10 min. cada hora durante 5 horas.
 Automatic working motor system for 10 minutes every hour during 5 hours.



Para otras alturas, consultar con nuestra división técnica.
 For other heights, please check with our Technical department.

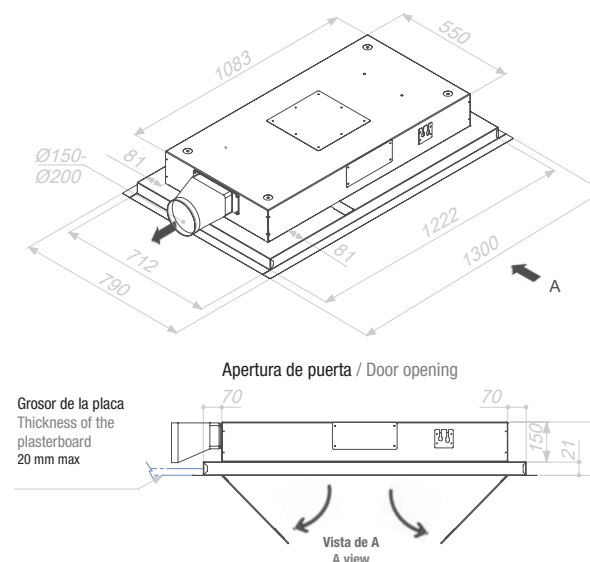

Altura mínima falso techo		Medidas Encastre	
Minimum height of false ceiling		Built in Sizes	
Motor Ext. Ø 200	310 mm	123 cm	1230 x 720
Motor Ext. 260 x 100	220 mm		

Esquema medidas / Technical Drawings

E-251

