



Model. 160 cm



Model. 130 cm

# E-265

Inox - Esmaltado y cristal blanco Ral 9003  
Stainless Steel - White enamel and glass

A+



Esquema medidas / Technical Drawings

## E-265

### Motor Interior / Interior Motor S.E.C. System®

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
130	V.1130 eco PLUS	Ø150	A	9586

### Motor Intermedio exterior / Duct-in-line motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
130	V.1550 eco	Ø150	A+	9587
	V.2450 eco	Ø200	A+	9589
160	V.2450 eco	Ø200	A+	9593
190	V.2450 eco	Ø200	A+	9597

### Motor de tejado / Remote Motor: Roof Outdoor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
130	V.2350 eco	Ø200	A+	9590
160	V.2350 eco	Ø200	A+	9594
190	V.2350 eco	Ø200	A	9598

### Opcionales / Options

#### AirLink

Modelo compatible. Es imprescindible solicitar esta opción en el pedido de la campana. No se equipa de serie. Compatible Model. This option must be requested together with the purchase order. Is not included as standard.

Kits de recirculación FCLR-AE. Ver página 206  
Activated carbon filters kit. FCLR-AE. See page 206

Opción cambio de LED ambiente original de 3000K a 4000K. Suministrado con la campana. Option of changing the original LED for a 4000K light LED. Optional change only possible in factory.

Conjunto botonera INOX de encastre a pared. Solo suministrado con la campana  
Stainless steel button panel set for embedding into the wall

Conjunto botonera BLANCO de encastre a pared. Solo suministrado con la campana  
White enamel button panel set for embedding into the wall

### Notas / Notes

Salida de humos de serie lateral corto para motor interior  
Standard short side fume outlet for interior motor

Opción salida de humos lateral largo para motor interior. Indicar en pedido  
Long side fume outlet option for interior motor, to be specified on order


Salida de humos de serie lateral largo, corto o techo para motor exterior  
Standard long or short side or ceiling fume outlet for exterior motor

La campana de 130 y 160 cm incorporan 2 filtros y 1 zona de iluminación. El modelo de 190 cm. incorpora 3 filtros y 2 zonas de iluminación. The 130 and 160 cm hood includes 2 filters and 1 lighting area. The 190 cm model. includes 3 filters and 2 lighting areas.


Para otras alturas, consultar con nuestra división técnica.  
For other heights, please check with our Technical department.




### Motor interior Interior Motor

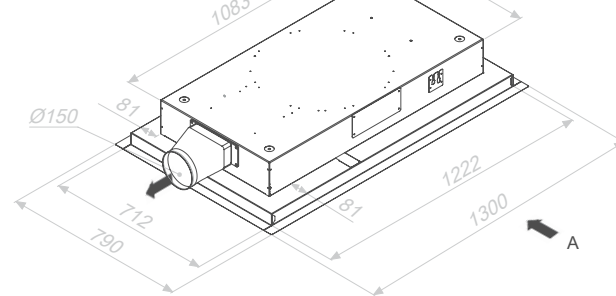

Apertura de puerta / Door opening

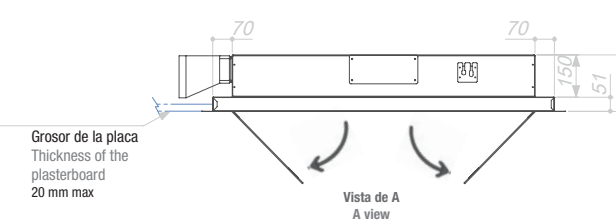

### Motor Intermedio exterior Duct-in-line motor

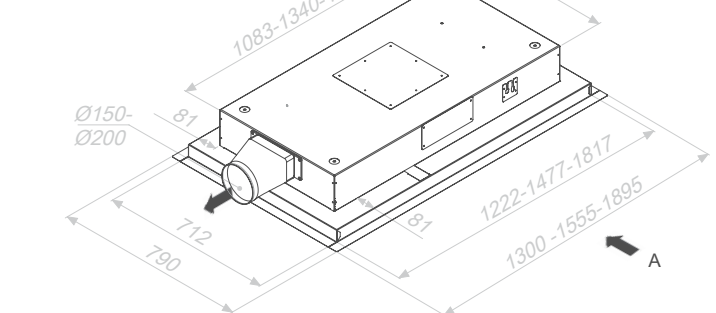

Altura mínima falso techo  
Minimum height of false ceiling

Motor Int.	210 mm
Motor Ext. Ø 200	300 mm
Motor Ext. 260 x 100	210 mm

Medidas Encastre  
Built in Sizes

130 cm	1230 x 720
160 cm	1485 x 720
190 cm	1825 x 720

Este modelo con motorización V.1130 ECO PLUS incorpora de serie 2 m de tubo de extracción de humos espiral Ø150 circular. This model with the V.1130 ECO PLUS motor system comes with 2 m of 150 diameter round spiral extractor flue as standard.

Las unidades con motorizaciones V.2450 Intermedio Exterior y V.2350 Tejado, incorporan de serie 5 m de tubo de extracción de humos SEC System® de Ø203 mm interior y Ø253 mm exterior. This model with the V.2450 duct-in-line remote motor and V.2350 roof motor system comes with 5 m of S.E.C. fume extractor flue as standard System®, interior Ø 203 mm and exterior Ø 253.