





E-297 Matt Black Glass

Features

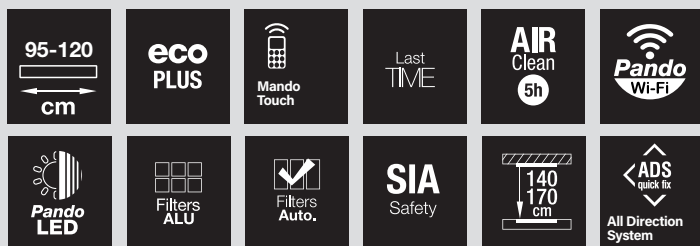

Opcionales



S.E.C. System® Matt Black Glass/ Motor Interior

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
95	V.1130 eco PLUS	Ø150	A+	010992
95	V.1250 eco PLUS	Ø150	A+	010993
120	V.1130 eco PLUS	Ø150	A+	010994
120	V.1250 eco PLUS	Ø150	A+	010995

Consultar otras motorizaciones

Recirculation Kits

Front. (cm)	Tipo	Ref.
95,120	FCRL-AE	1202570

Optional

AirLink

Compatible model. Not included as standard. Must be specified when placing the order

ECO PLASMA Filtration System

This model can be ordered without lighting

MATT BLACK recessed wall-mounted control panel assembly.

STAINLESS STEEL recessed wall-mounted control panel assembly.

WHITE recessed wall-mounted control panel assembly.

(*) Optional extras will be supplied together with the cooker hood. Clearly indicate "OPTIONAL EXTRA" on the order and provide all details accurately.

Notes

Rotating Motor Housing: The extraction outlet position can be changed thanks to the rotating motor housing.

Model available in any colour from the RAL chart. Price on request.



For other heights, please consult our Technical Department.




MATT BLACK recessed wall-mounted control panel assembly.
Also available in stainless steel or white.




Touch remote Control
Ref. 620062200478

Interior Motor V.1130

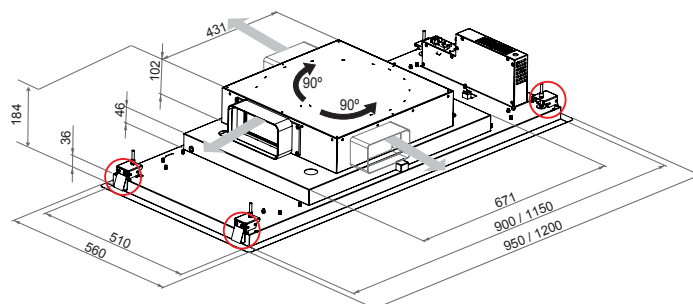

Reversible Door Opening. Rotating Motor Housing
Weight – Model 95: 22 kg / Model 120: 27 kg

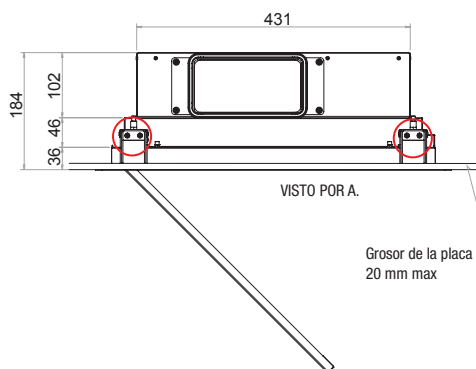


Cut-Out Dimensions

95 cm	910 x 515
120 cm	1160 x 515

Minimum False Ceiling Height

190 mm

Interior Motor V.1250

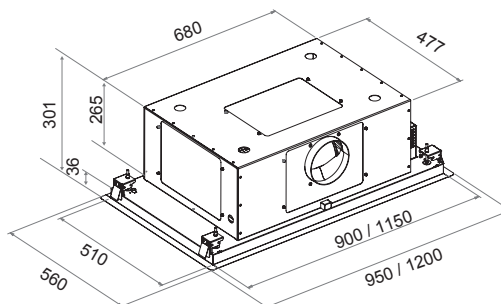

Cut-Out Dimensions

95 cm	910 x 520
120 cm	1160 x 520

Minimum False Ceiling Height

310 mm

INCLUDED

This model, when fitted with the V.1130 ECO PLUS motor, includes 2 m of circular Ø150 mm spiral extraction duct as standard.

Units fitted with the V.2450 Intermediate External Motor or V.2350 Roof Motor include 5 m of SEC System® extraction duct as standard, with an internal diameter of Ø203 mm and an external diameter of Ø253 mm.